

Ultra-Compact CWDM

Auxora's ultra-compact CWDM is an integrated optical device based on free-space tech bench which can significantly improve optical performance and minimize packaging size.

The Ultra-compact CWDM device features ultra-compact size and super thermal stability, as well as broad pass band and high isolation, which makes it to be ideally used for 40G transceivers as well as Datacom/Telecom network applications.



FEATURES

- Compact size & epoxy free optical path
- Industrial temperature(-40~85°C) available
- Good channel uniformity
- Ultra-low insertion loss
- Telcordia GR-1221 and GR1209 compliant

APPLICATIONS

- Access networks
- Metro WDM systems
- Telecommunications
- 4G/5G LTE mobile system


SPECIFICATIONS

Parameter		4-CH	5CH	8CH
Operating Wavelength (nm)		1260~1620		
CWDM Channel Spacing (nm)		20nm ITU Grid		
CWDM Channel Passband (nm)		$\lambda_c \pm 6.5$		
Insertion Loss (dB)	CWDM Channel	≤ 1.3	≤ 1.5	≤ 1.9
Passband Ripple (dB)		≤ 0.5		
Isolation (dB)	Adjacent	≥ 30		
	Non-adjacent	≥ 45		
Polarization Dependent Loss (dB)		≤ 0.1		
Directivity (dB)		≥ 50		
Return Loss (dB)		≥ 50		
Polarization Mode Dispersion (ps)		≤ 0.1		
Power Handling (mW)		≤ 500		
Operating Temperature (°C)		-40~85		
Storage Temperature (°C)		-40~85		
Package Dimensions(mm)		U1:22x9.8x6.5	U3: 26x11.5x6.5	U4:28x16.6x6.5
Fiber type		ITU-T G657.A2		


NOTES:

- 1) All specifications are based on the devices without connectors, and guaranteed over wavelength, polarization and temperature.
- 2) PMD and chromatic dispersion values are guaranteed by design.
- 3) IL is 0.3 dB higher, RL is 5 dB lower for connector added.
- 4) Specifications are subject to change without notice.


Spectral Diagram(Typical of 4 channel CWDM):

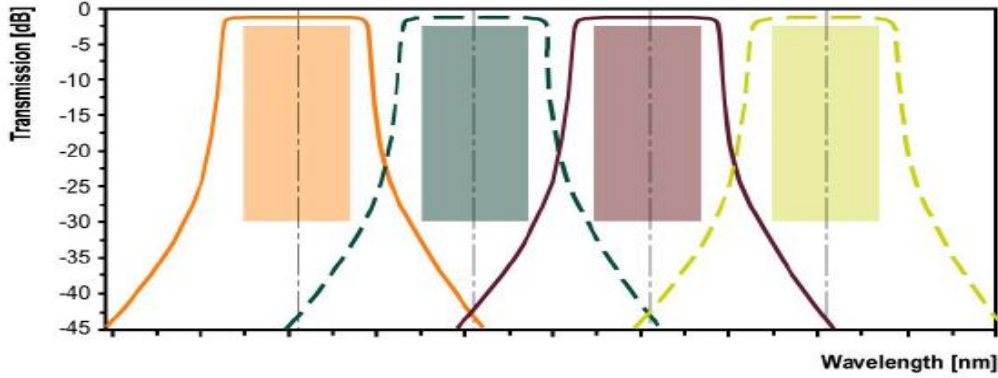

Package Dimensions (mm): 4CH

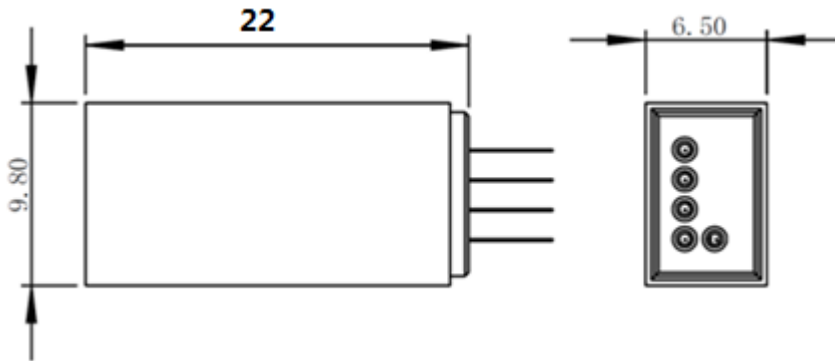

Port Configuration:

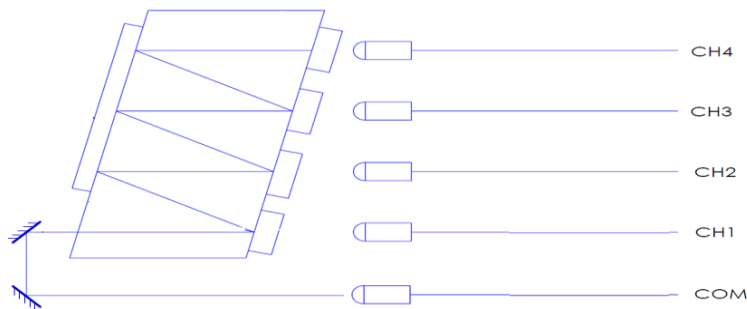

Ordering Information: (e.g. AUCCM-1M040047U11-1010-55)

AUCCM-	X	X	XX	XX(X)	XX	XX	X	-	XX	XX	-	X	X
	Serial Type	Module Type	Port Configuration	Special Ports	Initial Wavelength	Package Type	Fiber Jacket		Fiber Length			Connector	
									Input	Output		Input	Output
	0=0 Serial	M=Mux	01=1-CH	00=None	27=1270/1271	U1=22x9.8x6.5	0=250um Bare fiber		10=1.0m	10=1.0m		0=None	0=None
	1=1 Serial	D=Demux	02=2-CH	01=1310nm Port	29=1290/1291	U2=25x9.8x6.5	1=900um Tube		12=1.2m	12=1.2m		1=FC/UPC	1=FC/UPC
		X= customized	02=Monitor Port	U3=26x11.5x6.5	2=2.0mm Cable			2=FC/APC	2=FC/APC
			08=8-CH	03=Express Port	61=1610/1611	U4=28x16.6x6.5	3=3.0mm Cable		15=1.5m	15=1.5m		3=SC/UPC	3=SC/UPC
				04=UPG with Skipper		XX=Customized	X=Customized		XX=customized	XX=customized		4=SC/APC	4=SC/APC
				12=1310nm+Mon.								5=LC/UPC	5=LC/UPC
				13=1310nm+EXP.								6=LC/APC	6=LC/APC
				42=UPG+Monitor								X=Customized	X=Customized

				123=Express+Monitor +EXP.									