

## GFF Device

Auxora's Gain Flattening Filter (GFF) is a filter-based device which features ultra low insertion loss, super thermal stability and excellent reliability. The product uses lead-free packaging platform without epoxy on the optical path. The GFFs provide in-line compensation of the spectral gain profile of EDFAs, and can be used for high-power applications in DWDM system.



### FEATURES

- Low insertion loss
- Flat spectral gain
- Exceptional reliability and stability
- Epoxy free optical path
- Telcordia GR-1221 and GR1209 compliant

### APPLICATIONS

- Fiber optic amplifier


### SPECIFICATIONS

| Parameters                           | Unit | Value                                     |
|--------------------------------------|------|---|
| Operating Wavelength Range           | nm   | Refer to target curve                     |
| Peak Insertion Loss                  | dB   | ≤0.5                                      |
| Peak to Peak in Error Function Range | dB   | ≤0.5                                      |
| Optical Return Loss (Input & Output) | dB   | ≥50                                       |
| Polarization Dependent Loss          | dB   | ≤0.1                                      |
| Polarization Mode Dispersion         | ps   | ≤0.05                                     |
| Temperature Dependent Loss           | dB   | ≤0.15                                     |
| Maximum Power Handling               | mW   | 500                                       |
| Operating Temperature                | °C   | 0 ~ 70                                    |
| Storage Temperature                  | °C   | -40 ~ 85                                  |
| Humidity                             | --   | 5 ~ 95%                                   |
| Package Size                         | mm   | Standard: Φ5.5xL34<br>Mini Size: Φ3.0xL25 |
| Fiber Type                           | --   | ITU-T G.657.A                             |


### NOTES:

- 1) All specifications are based on the devices without connectors, and guaranteed over wavelength, polarization and temperature.
- 2) PMD and chromatic dispersion values are guaranteed by design.
- 3) IL is 0.3 dB higher, RL is 5 dB lower for each connector added

**Packing Dimensions(mm)**

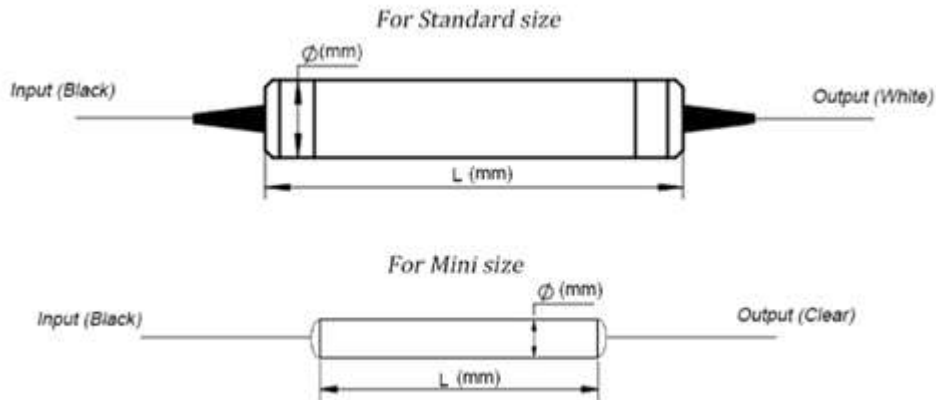

**Spectrogram(e.g. typical curve)**

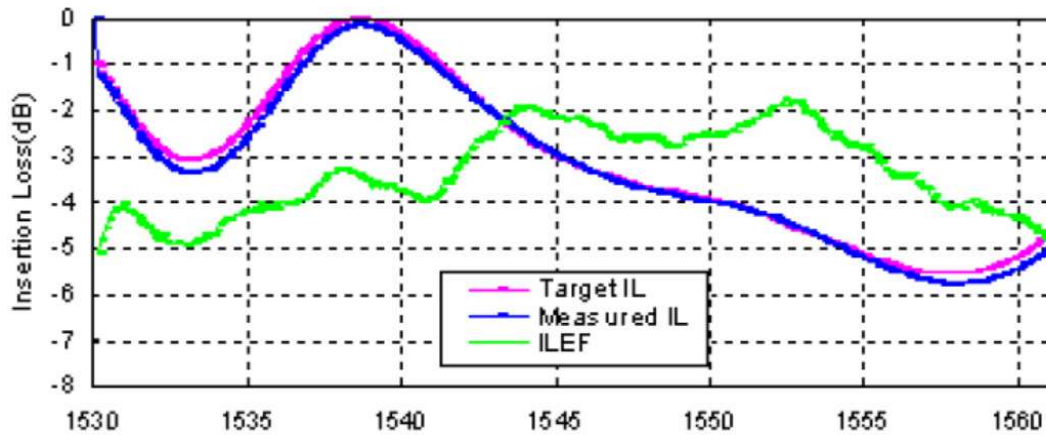

**Ordering Information: (e.g.AGFFD-11C1060-1010-00-004)**

| AGFFD-             | XX               | xxx          | X             | XX                 | X             | -             | XX           | XX           | -            | X | X | - | xxx |
|--------------------|------------------|--------------|---------------|--------------------|---------------|---------------|--------------|--------------|--------------|---|---|---|-----|
| Port Configuration | Wavelength Range | Package      | Fiber Type    | Fiber Jacket       | Fiber Length  |               | Connector    |              | Target Curve |   |   |   |     |
|                    |                  |              |               |                    | Input         | Output        | Input        | Output       |              |   |   |   |     |
| 11=1x1             | C=C Band         | 1=5.5x34     | 06=G657.A1    | 0=250um Bare fiber | 10=1.0m       | 10=1.0m       | 0=None       | 0=None       |              |   |   |   |     |
| XX=Customized      | L=L Band         | 2=5.5x40     | 07=G657.A2    | 1=900um loose tube | 12=1.2m       | 12=1.2m       | 1=FC/UPC     | 1=FC/UPC     |              |   |   |   |     |
|                    |                  | 4=3.0x25     | XX=Customized | X=Customized       | .....         | .....         | 2=FC/APC     | 2=FC/APC     |              |   |   |   |     |
|                    |                  | X=Customized |               |                    | 15=1.5m       | 15=1.5m       | 3=SC/UPC     | 3=SC/UPC     |              |   |   |   |     |
|                    |                  |              |               |                    | NA=N/A        | NA=N/A        | 4=SC/APC     | 4=SC/APC     |              |   |   |   |     |
|                    |                  |              |               |                    | XX=Customized | XX=Customized | 5=LC/UPC     | 5=LC/UPC     |              |   |   |   |     |
|                    |                  |              |               |                    |               |               | 6=LC/APC     | 6=LC/APC     |              |   |   |   |     |
|                    |                  |              |               |                    |               |               | X=Customized | X=Customized |              |   |   |   |     |